



## /// Control lime scale on foodservice equipment with Template-Assisted Crystallization (TAC) technology.

Lime scale is one of the most significant maintenance problems for foodservice and commercial markets. For years, water softeners have been virtually the only means for treating hard water, but another method is available—Template-Assisted Crystallization (TAC) technology.

The TAC Systems use a unique technology to convert hard, dissolved minerals left behind into harmless, inactive microscopic crystals. These crystals are relatively insoluble, effectively isolated from the water chemistry and anything that the water contacts.

Tested by an independent laboratory against the international protocol for scale prevention—TAC achieved a 99.6% effective rating, which is higher than any other water softener alternative.



TAC


### FEATURES:

- /// Scale-reducing technology assures reduced service on equipment by decreasing lime scale.
- /// Maintains good water minerals that provide benefits to customers' health while also creating high-quality drinks.
- /// No chemicals added to ingredient water to assure no off tastes in drinks.
- /// No cleaning needed assures no water waste.
- /// Extremely efficient—5 second contact time regardless of hardness level.
- /// Long-lasting media.
- /// No salt or other regenerates required.
- /// No control valve or electricity required.

# /// Template Assisted Crystallization Systems | TAC

## Specifications

Model & Mfg. No.	Maximum Flow Rate	Inlet	Outlet
TAC-01 9700903	1 gpm (3.8 lpm)	3/4" FNPT	3/4" FNPT
TAC-02 9700906	2 gpm (7.6 lpm)	3/4" FNPT	3/4" FNPT
TAC-05 9700905	5 gpm (18.9 lpm)	1" FNPT	1" FNPT

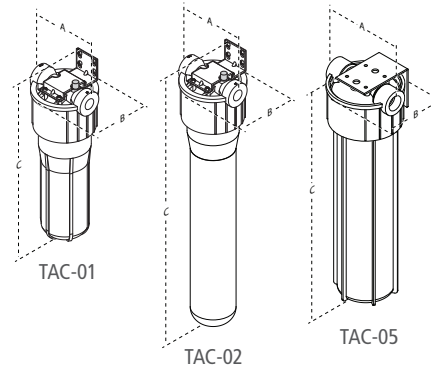

## Water Chemistry Specifications

TAC Systems	
pH	6.5 to 8.5
Max. Hardness	75 grains (1300 ppm CaCO <sub>3</sub> )
Temperature	41°F to 100°F (5°C to 38°C)
Chlorine	< 3 ppm
Iron	0.3 mg/l
Manganese	0.05 mg/l
Copper	1.3 mg/l
Oil & H <sub>2</sub> S	Remove prior to TAC

## Dimensions

Model & Mfg. No.	Width (A)	Depth (B)	Height (C)	Operating Weight
TAC-01 9700903	5 1/2" (14 cm)	6 1/2" (17 cm)	15 1/2" (39 cm)	10 lbs. (4.5 kg)
TAC-02 9700906	5 1/2" (14 cm)	6 1/2" (17 cm)	26" (66 cm)	20 lbs. (9 kg)
TAC-05 9700905	7 1/2" (19 cm)	9" (23 cm)	22" (56 cm)	20 lbs. (9 kg)

## Applications

### Foodservice & Institutional

- /// Coffee and Tea Brewers
- /// Steamers

### Foodservice & Institutional

- /// Hotels, Hospitals, Apartments, Car Washes, Restaurants, etc.
- /// RO Pretreatment
- /// Humidifiers, Evaporative Cooling
- /// Instantaneous or Tankless Water Heaters

Note: Flow-to-drain, blow-down valve, or self-cleaning procedure recommended for any equipment using hot water that follows a TAC system.

## Shipping Dimensions

Model & Mfg. No.	Length	Width	Height	Weight
TAC-01 9700903	17" (43 cm)	12" (30 cm)	18" (46 cm)	8 lbs. (3.6 kg)
TAC-02 9700906	27" (69 cm)	19" (48 cm)	17" (43 cm)	12 lbs. (5.4 kg)
TAC-05 9700905	27" (69 cm)	19" (48 cm)	17" (43 cm)	12 lbs. (5.4 kg)

## Replacement Cartridges

Mfg. No.	Item
7000708	TAC-01 Cartridge
7000716	TAC-02 Cartridge
7000554	TAC-05 Cartridge



Antunes delivers a complete range of countertop cooking equipment and water filtration solutions to foodservice operations around the world. Learn more about Antunes and its products at [antunes.com](http://antunes.com).

**Corporate Headquarters**  
Carol Stream, IL, USA  
Phone: +1.630.784.1000  
Toll Free: +1.800.253.2991

**China Facility**  
Suzhou, China  
Phone: +84.512.6841.3637  
Fax: +86.512.6841.3907

**India Facility**  
Chennai, India  
Phone: +91.442.5532212  
Fax: +91.442.5532415